

TD5 Beer Brewing Pump



Typical Applications

- Home Beer Brewing Pump
- Hot Water Circulation
- Beverage Dispenser
- General Liquid Transfer

Features

- Food-grade, FDA certified
- All stainless steel pump body, resistant to 110°C high temperature
- Intelligent speed regulation
- Easy to clean, long lifetime
- Super quiet


Specification

Model	Product Code	Rated Voltage (VDC)	Max Water Flow (L/min)	Max Water Head (M)	Rated Current (A)	Rated Power (W)	At Max Efficiency Point	
							Rated Spec. (L/min @ M)	Rated Power (W)
TD5	TD5-A24-2805	24	28	4.5	1.2	28.8	15.53 @ 2.67	27.6

Customization: 1. /PWM or /5V speed control 2. /FG (RPM) signal wire

- The data in the table is the measured performance when pure water is delivered at normal temperature.
- The maximum flow rate is the flow rate when water head is 0 meter, and the highest lift is the lift when water flow is 0 L/min.
- Noise ≤ 45dB(A)
- Working mode: Continuous
- IP level: IP52
- Coil Insulation class: Class F
- Ambient temperature: -40°C ~ 40°C
- Liquid temperature: -40°C ~ 110°C
- Do Not Run Pumps Dry.
- Pumps must be in a continuous flooded suction environment.

Curve

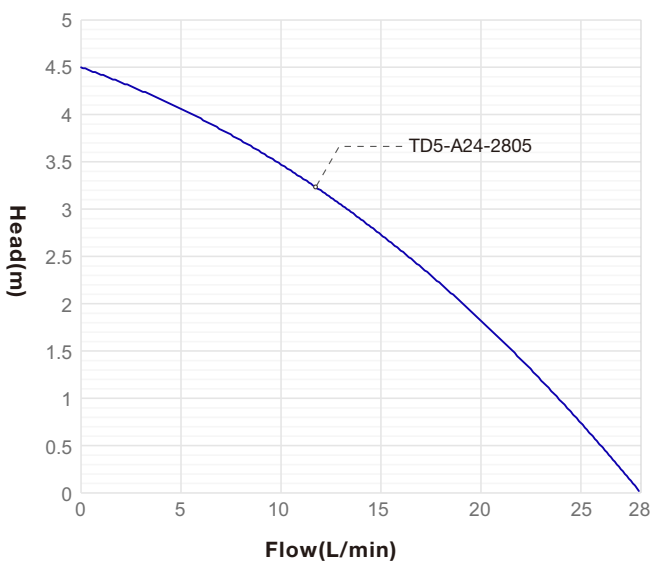

Dimension (mm)

